

RECESSED ROUND CEILING SPEAKER BACKBOX V-5335030-5

INTRODUCTION

Fits back of Recessed Round Ceiling Speaker (V-5330115 & V-5330215). Complies with all fire codes in air plenum applications.

DIMENSIONS/WEIGHT

- 12.3"Dia. x 4.0"H
(31.24cm x 10.16cm)
- 2.0 lbs. (0.9 kg)

INSTALLATION

1. Cut an eight and one-half inch square hole in ceiling tile using the support bridge as a template.
2. Bend up the four horseshoe tabs on the support bridge.
3. Position the support bridge on the tile and bend the eight locator tabs into the tile opening.
4. Install the UL listed metallic enclosure entry fitting to the knockout to accommodate plenum cable or fitting for conduit.
5. Install the enclosure to the bridge by orienting the four enclosure slots over the four horseshoe tabs of the bridge.
6. With pliers, twist the four horseshoe tabs on the bridge one-half turn, securing the enclosure to the bridge. (Note: Four slots provided on each enclosure to mate with four twist tabs on support bridge eliminates need for screws.)
7. Install the speaker/baffle assembly with the four 8-32 screws. (Screws are provided with the assembly.)

Note: Listed by Underwriters Laboratories, Inc. Category UUMW. Material and construction permits use where ceiling plenum is part of the air handling system.

Note: Compound knockout(s) provided for listed type metallic type fittings for one-half inch and three-quarter inch plenum rated cable and plenum whip flex conduit.

Note: All cable splices and connections to speaker/transformer pigtails must be made inside of listed enclosure.

TECHNICAL ASSISTANCE

When calling, have a VOM and a telephone test set available and call from the job site. Call (540) 563-2000 and press 1 for PagePac Technical Support, or visit our websites at <http://www.pagepac.com> and www.valcom.com.

Should repairs be necessary, attach a tag to the unit clearly stating company name, address, phone number, contact person, and the nature of the problem. Send the unit to:

Valcom, Inc.
PagePac[®] Repair Dept.
5614 Hollins Road
Roanoke, VA 24019-5056

USING THE BRIDGE SUPPORT AS A TEMPLATE, MARK A SQUARE OPENING IN THE CEILING TILE AS SHOWN IN THE ILLUSTRATION. REMOVE THE BRIDGE SUPPORT AND CUT OUT THE SQUARE WITH A UTILITY KNIFE.

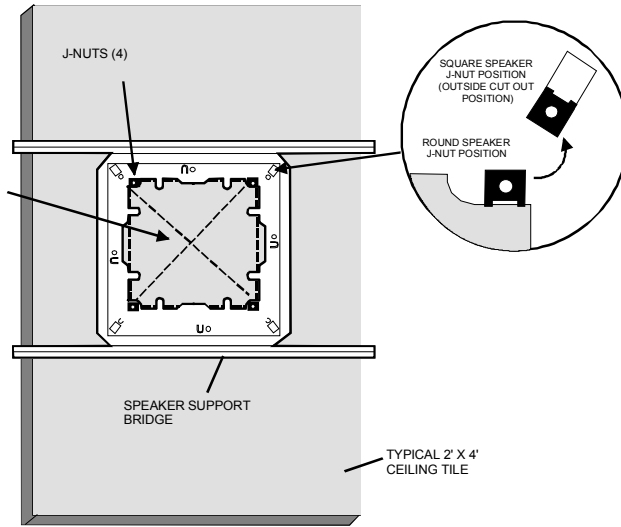


FIGURE 1

POSITION THE BACKBOX ONTO THE BRIDGE SUPPORT AS SHOWN AND USE HORSESHOE TABS TO SECURE IT INTO PLACE.

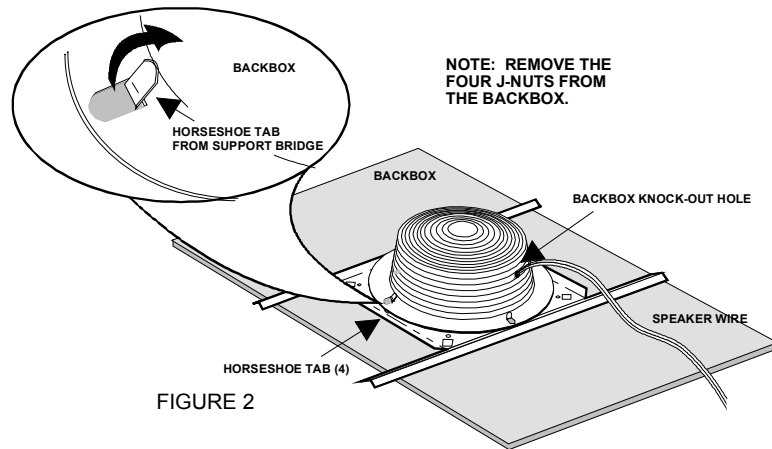


FIGURE 2

VALCOM LIMITED WARRANTY

Valcom, Inc. warrants its products to be free from defects in materials and workmanship under conditions of normal use and service for a period of one year from the date of shipment. The obligation under this warranty shall be limited to the replacement, repair or refund of any such defective device within the warranty period, provided that:

1. inspection by Valcom, Inc. indicates the validity of the claim;
2. the defect is not the result of damage, misuse, or negligence after the original shipment;
3. the product has not been altered in any way or repaired by others and that factory sealed units are unopened (a service charge plus parts and labor will be applied to units defaced or physically damaged);
4. freight charges for the return of products to Valcom are prepaid;
5. all units 'out of warranty' are subject to a service charge. The service charge will cover minor repairs (major repairs will be subject to additional charges for parts and labor).

This warranty is in lieu of and excludes all other warranties, expressed or implied and in no event shall Valcom, Inc. be liable for any anticipated profits, consequential damages, loss of time or other losses incurred by the buyer in connection with the purchase, operation, or use of the product.

This warranty specifically excludes damage incurred in shipment. In the event a product is received in damaged condition, the carrier should be notified immediately. Claims for such damage should be filed with the carrier involved in accordance with the F.O.B. point.

Headquarters:
 Valcom, Inc.
 5614 Hollins Road
 Roanoke, VA 24019
 Phone: (540) 563-2000
 Fax: (540) 362-9800